

Assembly and Installation Instructions for Model

50084ODW


CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

Warning please make sure the electrical breaker is shut off before commencing with this installation

This fixture is certified for wall mounting only and is suitable for Wet locations

Package Contents		
Part	Description	Qty
A	Mounting plate	1
B	Mounting plate screws	2
C	Gasket	1
D	Back-box	1
E	Fixture assembly	1
F	Wire connectors	1
H	Back-box nuts and washers	2
I	Fixture mounting screws	4

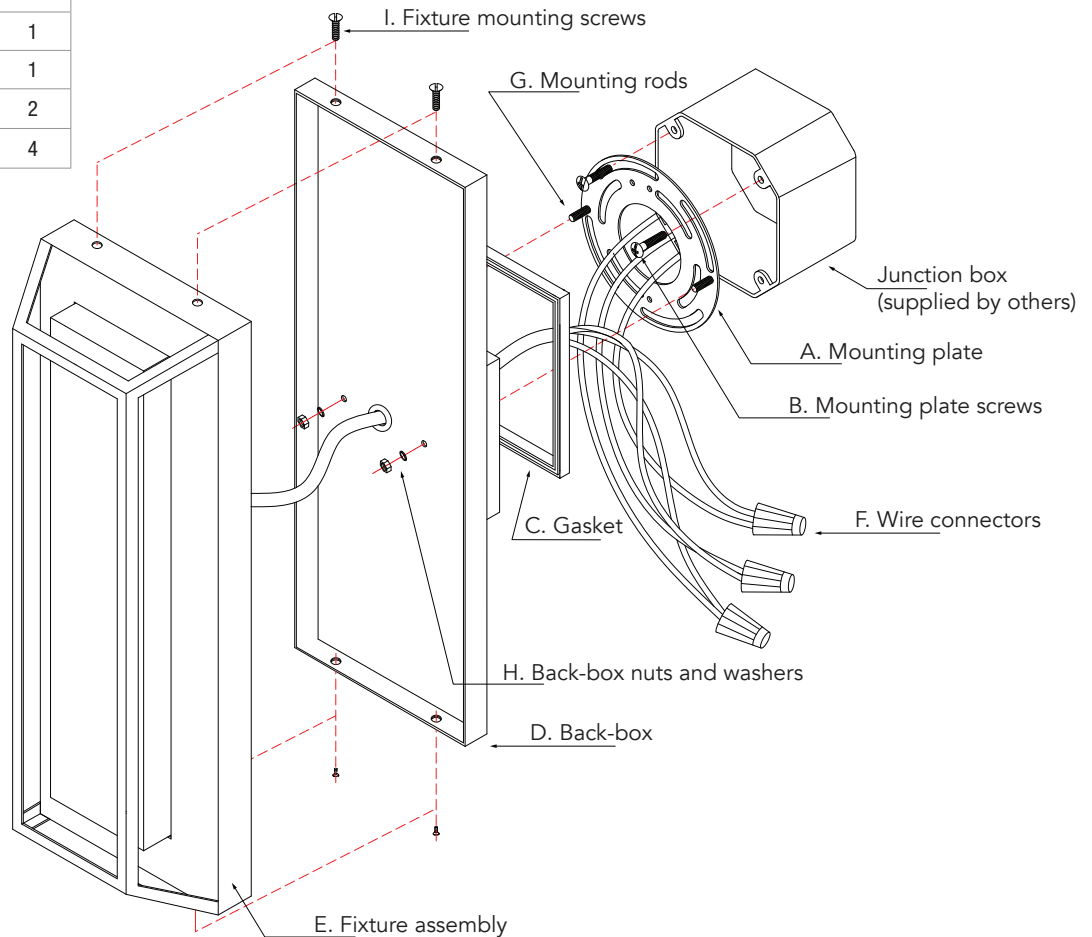

Installing the fixture *please ensure the electrical breaker is switched off before commencing*

- 1 Attach the Mounting plate (A) to the Junction box with supplied Mounting plate screws (B) and make sure the Mounting rods (G) attached to the Mounting plate are level.
- 2 Attach the Gasket (C) to the rear of the Back-box (D) and feed the wires from the Fixture assembly (E) through the Back-box. Attach the wires from the Fixture assembly (E) to the Supply wires using the supplied Electrical wire connectors (F). White supply wire to the White fixture wire, Black supply wire to Black.
- 3 Insert the Back-box (D) to the Mounting plate Mounting rods (G) and secure with Fixture knurled nobs and washers (H).
- 4 Attach the Fixture assembly (E) using the supplied Fixture mounting screws (I).
- 5 Re-connect the electrical breaker and the fixture is now ready for years of trouble free use.