

ASSEMBLY INSTRUCTIONS

ITEM NO:FX-3758-1

IMPORTANT SAFETY INSTRUCTIONS:


These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.

DIRECT WIRE FIXTURES:WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

TO ASSEMBLE:

Shut off the main electrical supply at fuse box/circuit breaker.
Remove all parts from carton. Do not throw away any parts as shown.

1. Install the mounting bracket (A) to junction box with screw (B).
2. Screw the long pole (J) clockwise onto the lamp body (K) to tighten.
3. Screw the long pole (I) clockwise into the long pole (J) to tighten.
4. Screw the long pole (H) clockwise into the long pole (I) to tighten.
5. Screw the short pole (G) clockwise into the long pole (H) to tighten.
6. Screw the short pole (F) clockwise into the short pole (G) to tighten.
7. Screw the canopy (E) clockwise into the short pole (F) to tighten.
8. Put the wire (C) through all the poles (J, I, H, G and F,) and the canopy (E), Then adjust the wire (C) to desired length and secure it with plastic clip (O).
9. Put the wire (C) through the bracket (A).
10. Connect the ground wires “ $\overline{\text{F}}$ ” to the supply wire “F”.
Cathode wire “N” in white to the supply wire, Anode wire “L” in black to the supply wire in the junction box. Install the canopy (E) to the bracket by screws (D).
11. Place shade (N) onto socket (L), Then screw socket ring (M) into the shade (N) clockwise to tighten.
12. Turn on the power and enjoy!

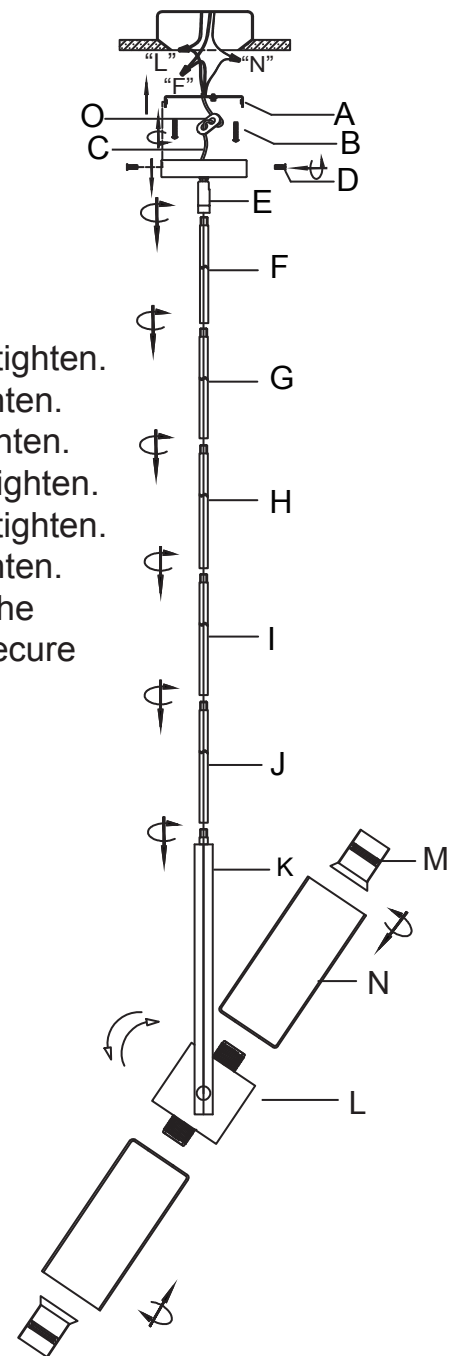

**USE MAX 2x60 WATTAGE TYPE T BULB
(NOT INCLUDED)**

To clean, wipe the fixture with a soft, dry cloth. Avoid the use of harsh or abrasive chemicals as they may damage the finish .

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.