Excel

Our new LED Panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.

UPGRADE

WET

ENERGY STAR

AIR TIGHT

Intertek

IC RATED

2700k 3000k 3500k 4000k 5000k

COLOR TEMPERATURE

WARM DIMMING*



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
5003-CC	3"	8 W	560 lm	640 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V
5004-CC	4"	11 W	770 lm	880 lm			
5005-CC	5"	12 W	800 lm	980 lm			
5006-CC	6"	14 W	980 lm	1120 lm			
5004-DW*	4"	11 W	750 lm	880 lm		3000-2200 K	120 V

*Dim-to-warm technology, dims from 3000 K to 2200 K

Specifications

Every fixture includes a junction box with an integrated driver
Over 35,000 hours of service life
Can be daisy chained
Minimal heat emission
Edge lit technology
Cast aluminum construction
Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K
Easy-access CCT switch on panel wire
Very low profile
IC certification (suitable for direct contact with insulation)
Air-tight certified as per ASTM E283-04
Suitable for wet locations
Ideal operating temperature: -20° to 40° C
Refer to website for dimmer compatibility
5-year warranty

Finish

BK Black
(5004, 5005, 5006)

SN Satin Nickel
(5004)

WH White
(5003, 5004, 5005, 5006)

Note
Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

Order example

5005-CC-WH
White 5" round panel with 800 lumens at 3000 K

Accessories

REC-PT4-BB (5004)
4" recessed panel trim in brushed brass

REC-PT4-BK (5004)
4" recessed panel trim in black

REC-PT4-SN (5004)
4" recessed panel trim in satin nickel

REC-EXT108
108" extension cable

RFP-23 (5003)
Rough-in plate


RFP-46 (5004, 5006)
Rough-in plate

RFP-58 (5005)
Rough-in plate


RFP-UNI (5003, 5004, 5006)
Universal rough-in plate




5003-CC

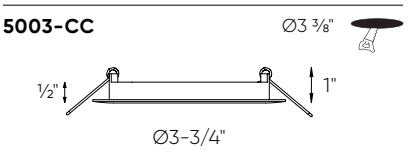

5004-CC, 5004-DW

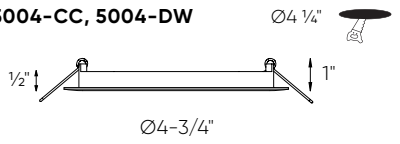

5005-CC

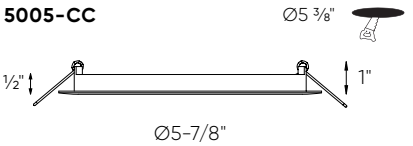

5006-CC

