

KERRVILLE ONE LIGHT PENDANT

6515201

General Product Information



SAVE THESE INSTRUCTIONS!

STANDARD INSTALLATION

INDOOR

DAMP LOCATION SAFE

NEC COMPLIANT JUNCTION BOX

CONVERTS TO LED

BULB(S) (NOT INCLUDED)

PLEASE SEE visualcomfort.com FOR PRODUCT SPECS

BEST PRACTICE: HANDLE FIXTURE WITH GLOVES

CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



WIRE CUTTER



PENCIL/MARKER

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

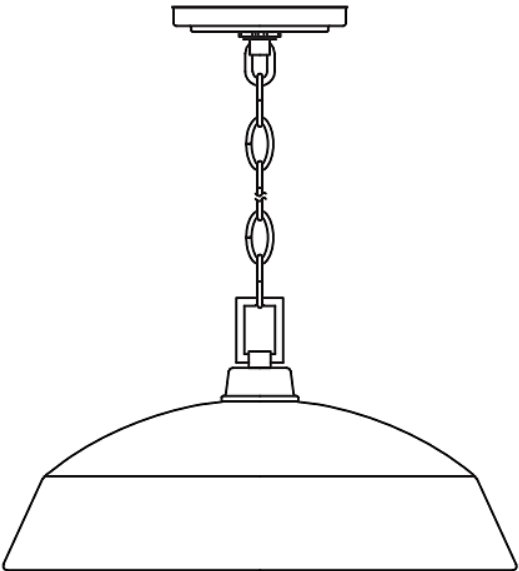

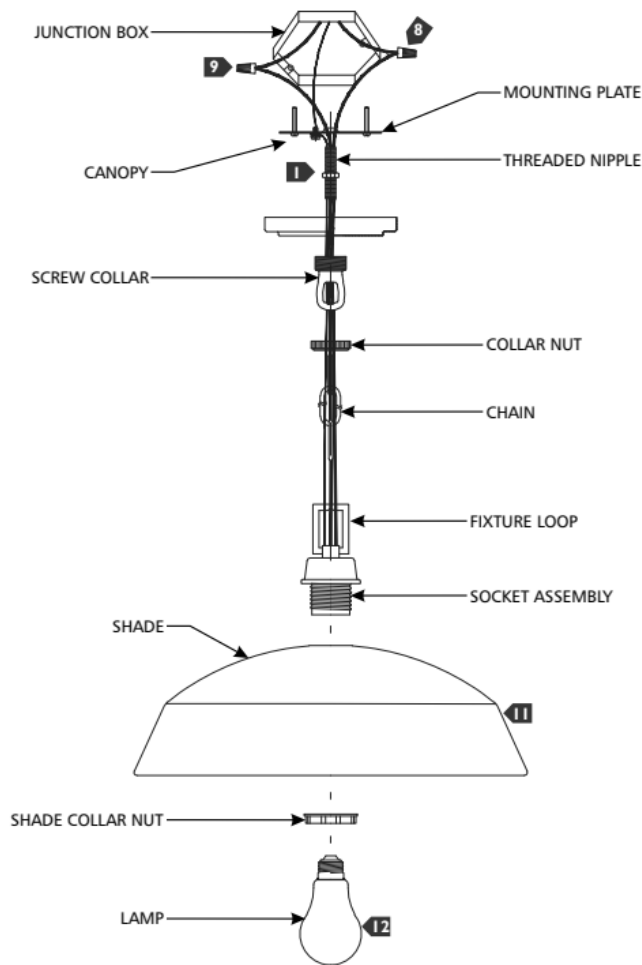

INSTRUCTIONS

I. Preparing the Fixture

1. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
2. Secure the mounting plate to the junction box.
3. Screw the screw collar tightly onto the threaded nipple.
4. Determine the desired height of the fixture and remove a portion of the chain by opening a link and removing it from the bottom.
5. Install the canopy and the collar nut onto the chain (in that order), then install the open link onto the fixture loop and secure it in place by closing the link.
6. Weave the cord through the chain, screw collar, canopy, threaded nipple, and out of the junction box. Trim the cord, leaving enough length to make electrical connections.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black/smooth) to hot power line wire
 - b) Neutral fixture wire (white/textured) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.
2. Place the shade onto the socket and secure it in place by screwing the shade collar nut onto the socket.
3. Screw the lamp into the socket. Refer to the socket label for max wattage information.