

ASSEMBLY & INSTALLATION INSTRUCTION FOR #494-1S

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Screw the **FIXTURE MOUNTING SCREWS (13)** into the **BACK PLATE (2)** and thread the **HEX NUTS (14)** onto the **FIXTURE MOUNTING SCREWS (13)**, as shown. Secure the position of the **FIXTURE MOUNTING SCREWS (13)** by tightening the **HEX NUTS (14)** against the **BACK PLATE (2)**.
2. Carefully pass the power supply (6&8) wires and the **SUPPLY GROUND WIRE (5)** through the center hole of the **BACK PLATE (2)**. Secure the **BACK PLATE (2)** to the **OUTLET BOX (1)** with **MOUNTING SCREWS (3)**.
3. From Glass interior, thread the **GLASS MOUNTING SCREW(22)** through the hole of the **GLASS SHADE(23)** into the **ARM ASSEMBLY(20)** till tight. Thread the **SOCKET ASSEMBLY(24)** onto the **NIPPLE(21)**.
4. Thread the **RODS (17) (18) (19)** onto the **ARM ASSEMBLY(20)** to get your desired height. Thread the **SWIVEL ASSEMBLY(16)** into the upper **ROD(17)**.
5. Attach the **BLACK SUPPLY WIRE (8)** to the **SMOOTH (OR BLACK) FIXTURE LEAD WIRE (9)** by using the **WIRE CONNECTOR (10)**. At the same manner, attach the **WHITE SUPPLY WIRE (6)** to the **RIBBED (OR WHITE) FIXTURE LEAD WIRE (7)**. Loop the **FIXTURE GROUND WIRE (4)** around the **GROUND SCREW (11)** of the **BACK PLATE (2)**. (Note: Be sure to provide an extra 3" length of the **FIXTURE GROUND WIRE (4)** for connection to the **SUPPLY GROUND WIRE (5)**.) Tighten the **GROUND SCREW (11)**. Connect the remaining **FIXTURE GROUND WIRE (4)** to the **SUPPLY GROUND WIRE (5)** using a **WIRE CONNECTOR (10)**. Place wiring and connections inside the **OUTLET BOX (1)**.
6. Place the **COVER PLATE (12)** onto the **FIXTURE MOUNTING SCREWS (13)**, and secure it into place using the **BALL NUTS(15)** provided.
7. Screw light bulb into the socket and make sure it does not exceed the maximum wattage specified on the fixture's wattage rating label.

INSTALLATION IS NOW COMPLETED

FIG

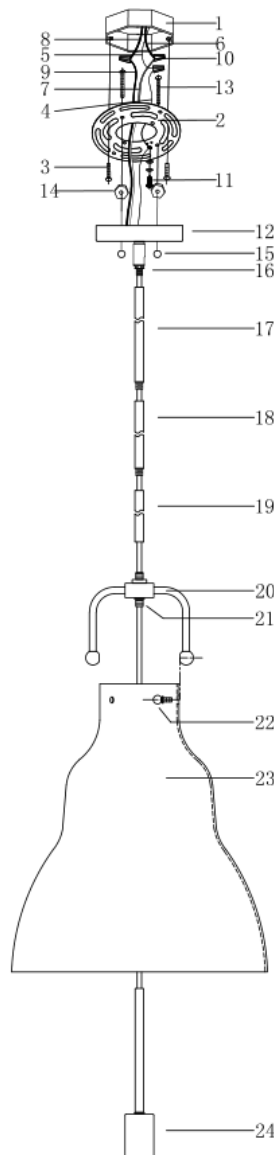

1. OUTLET BOX
2. BACK PLATE
3. MOUNTING SCREW
4. FIXTURE GROUND WIRE
5. SUPPLY GROUND WIRE
6. WHITE SUPPLY WIRE
7. RIBBED (OR WHITE) FIXTURE LEAD WIRE
8. BLACK SUPPLY WIRE
9. SMOOTH (OR BLACK) FIXTURE LEAD WIRE
10. WIRE CONNECTOR
11. GROUND SCREW
12. COVER PLATE
13. FIXTURE MOUNTING SCREW
14. HEX NUT
15. BALL NUT
16. SWIVEL ASSEMBLY
17. ROD
18. ROD
19. ROD
20. ARM ASSEMBLY
21. NIPPLE
22. GLASS MOUNTING SCREW
23. GLASS SHADE
24. SOCKET ASSEMBLY