





VOLVER MEDIUM & LARGE DOUBLE SCONCES

KWWS49827; KWWS58027

General Product Information










Suggested/Required Tools



ELECTRIC DRILL

PHILLIPS-HEAD SCREWDRIVER

PENCIL/MARKER

WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



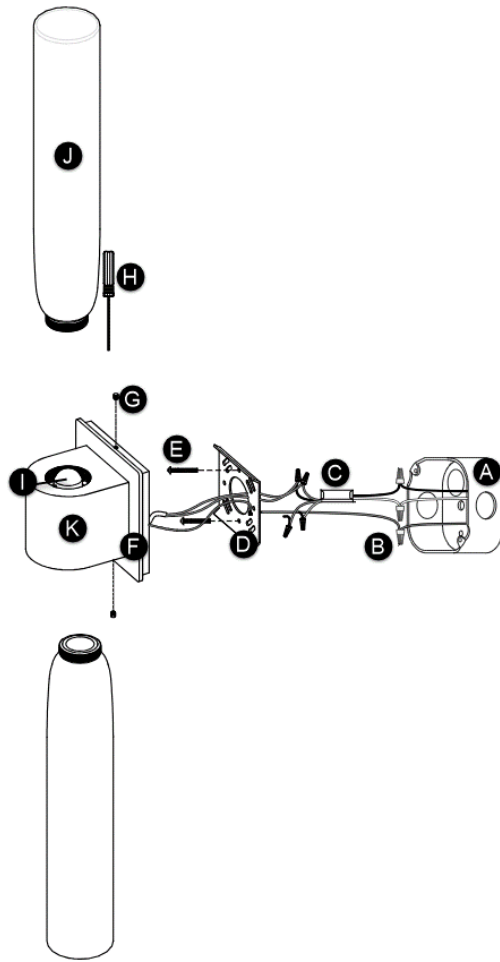

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate
- E. Mounting Screws
- F. Fixture Base
- G. Fixture Screws
- H. Screwdriver
- I. LED Assembly
- J. Glass Shades
- K. Fixture

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the fixture base.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire (white) to neutral power line wire
 - b) Hot driver wire (black) to hot power line wire
3. Secure the mounting plate to the junction box using the mounting screws, ensuring the driver output wires are accessible.
4. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
5. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Black (negative) driver wire (output) to blue fixture wire
 - b) Red (positive) driver wire (output) to red fixture wire
6. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not using a dimmer.
7. Carefully tuck and all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Mount the fixture base onto the mounting plate and secure it in place by installing the fixture screws.
2. Screw the glass shades into the fixture to complete installation.