

PONTE LARGE LINEAR CHANDELIER

SLLS57130

General Product Information



ETL LISTED
Intertek



SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION



INDOOR



DAMP LOCATION SAFE



NEC COMPLIANT JUNCTION BOX



INTEGRATED LED
NO BULBS REQUIRED



DIMMABLE
(LED, ELV, TRIAC & 10V)



ADAPTABLE TO SLOPED CEILINGS



PLEASE SEE
visualcomfort.com
FOR PRODUCT SPECS



CLEAN WITH SOFT,
DRY CLOTH ONLY. NO
HARSH CHEMICALS!



BEST PRACTICE:
HANDLE FIXTURE
WITH GLOVES



Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD
SCREWDRIVER



PENCIL/MARKER



WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

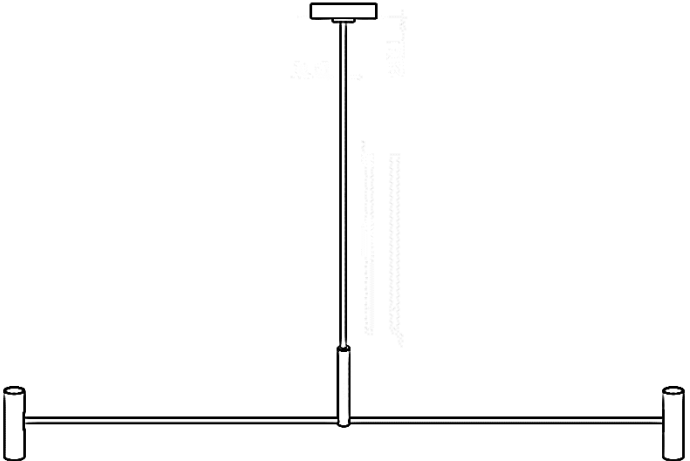

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate with Screw Collar
- E. Mounting Screws (2)
- F. Ground Screw
- G. Half Ball
- H. Stem Assembly
- I. Canopy
- J. Collar Nut
- K. Fixture
- L. Fixture Arms
- M. Fixture Shades/Heads
- N. LEDs

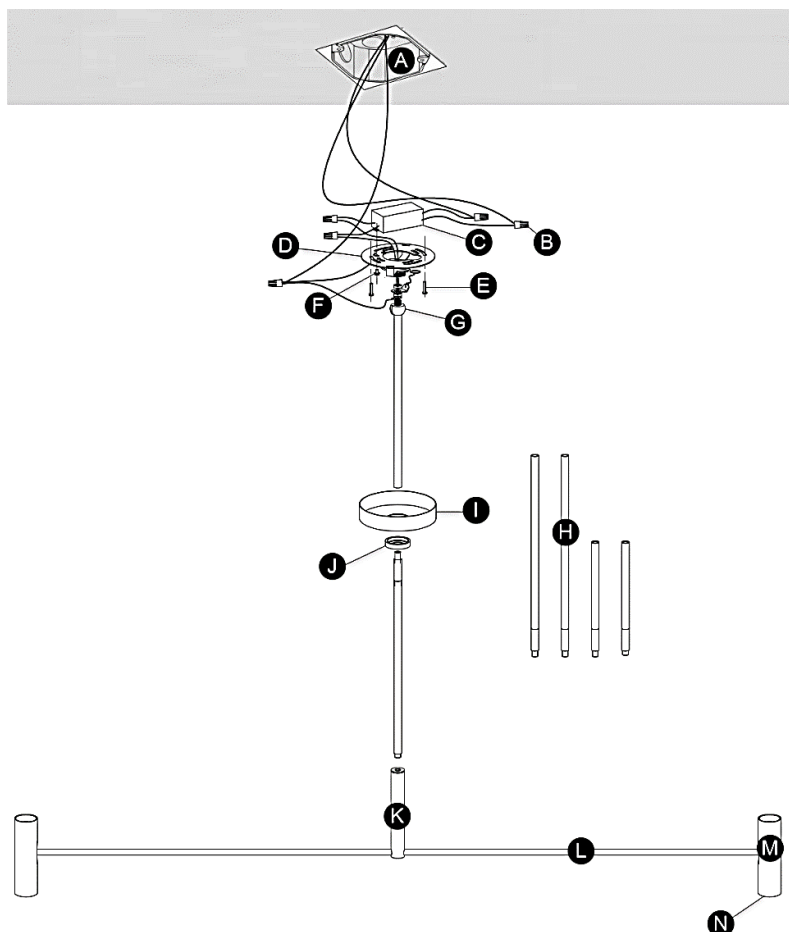

INSTRUCTIONS

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the fixture.
2. Determine the desired height of the fixture and complete the stem assembly to suit by screwing the stems together.
3. Feed the fixture wires through the stem assembly, collar nut, canopy, and half ball.
4. Screw the stem assembly on top of the fixture. Then screw the half ball onto the stem assembly.

II. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire (white) to neutral power line wire
 - b) Hot driver wire (black) to hot power line wire
3. Ensuring the driver output wires are accessible, secure the mounting plate with screw collar to the junction box using the mounting screws.
4. Slide the half ball assembly onto the screw collar portion of the mounting plate.
5. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
6. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Black (negative) driver wire (output) to blue fixture wire
 - b) Red (positive) driver wire (output) to red fixture wire
7. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not using a dimmer.
8. Carefully tuck all the wires behind the mounting plate into the junction box.
9. Place the canopy onto the mounting plate with screw collar and secure it in place by screwing the collar nut tightly onto it.
10. Rotate and adjust the fixture shades/heads to preference.