

NX-815-LED

Recessed Adjustable LED Edge-Lit Exit Sign
with 90° Adjustability, Battery Backup.
Lamp: LED Source

PRODUCT DESCRIPTION

Architectural acrylic edge-lit sign for applications requiring a recessed installation where the wiring compartment is concealed within a galvanized steel housing. Uses included, but are not limited to museums, galleries, office building lobbies, etc. Incorporates 25+ year LED source.

BODY

Galvanized steel housing with die-cast cover plate and acrylic panel.

FACE

Edge-lit Exit is available in either single or double face. Acrylic face has rounded and finished edge for attractive appearance. Red or green 6" lettering inside face with adhesive mounted chevrons included. Face can be adjusted in the field from 0° to 90° for wall, ceiling or sloped applications.

MOUNTING

Two 13-3/4" to 24-1/2" adjustable bar hangers with captive nails are included on housing. Bar hangers are parallel to junction box, but can be repositioned 90° perpendicular to junction box if desired. A T-Bar notch allow for easy installation in a suspended ceiling.

ELECTRICAL

Input: Dual 120V/277V (0.038A / 0.017A)

Wattage: 3 Watts normal / 5 Watts emergency operation

Light Source: Long life LED sources

Testing: High charge / ready operation indicator light with test button and automatic reset

Circuit Protection: Isolated surge / short circuit protection (Disconnect for deep discharge)

Life Expectancy: 25 Years with no change in illumination level

BATTERY BACKUP

Replaceable 90-minute Ni-Cad battery (NEB-NICAD)

LABELS AND LISTINGS

ETL Listed

NEC

NFPA

State & Municipal

5 Year Warranty on materials and workmanship

ACCESSORIES

NEXC-G: Replacement Green Chevrons

NEXC-R: Replacement Red Chevrons

NEB-NICAD: Replacement 4.8V Ni-Cad Battery

NORALIGHTING.

Type


Project

Catalog No.

Lamp/Wattage

DIMENSIONS

NX-815-LED

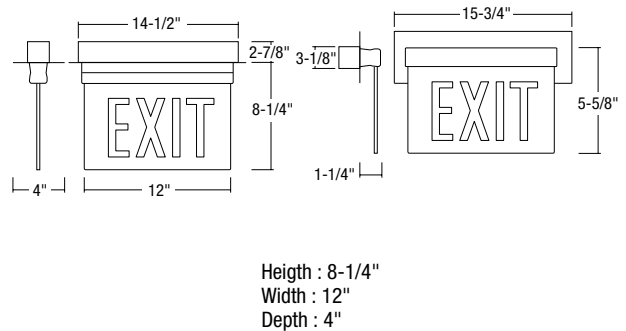

LED Exit Sign

Catalog No.	Letter Color	Panel Style	Housing
☐ NX-815	☐ R = Red	☐ C = Clear One Side	☐ A = Aluminum
	☐ G = Green	☐ M = Mirror One Side	☐ W = White
		☐ 2M = Mirror One Side	☐ B = Black

Create a complete track head number: Example: NX-815-LED/RCA

NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040 • Phone: 800.686.6672 • FAX: 800.500.9955 • www.noralighting.com
e-mail: nora@noralighting.com • Specifications subject to change without notice. © 2014